

Rec'd PCT/PTO 24 DEC 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/519344



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001159 A1

(51) International Patent Classification⁷: E04F 21/18

(21) International Application Number:
PCT/AU2003/000803

(22) International Filing Date: 25 June 2003 (25.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PS 3231 25 June 2002 (25.06.2002) AU

(71) Applicant and

(72) Inventor: WESTTHORP, Lee, Anthony [AU/AU]; 118
Augusta Street, Glenelg East, South Australia 5045 (AU).

(74) Agent: A.P.T. PATENT AND TRADE MARK ATTOR-
NEYS; P.O. Box 222, Mitcham, South Australia 5062
(AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOVABLE TILE SPACER

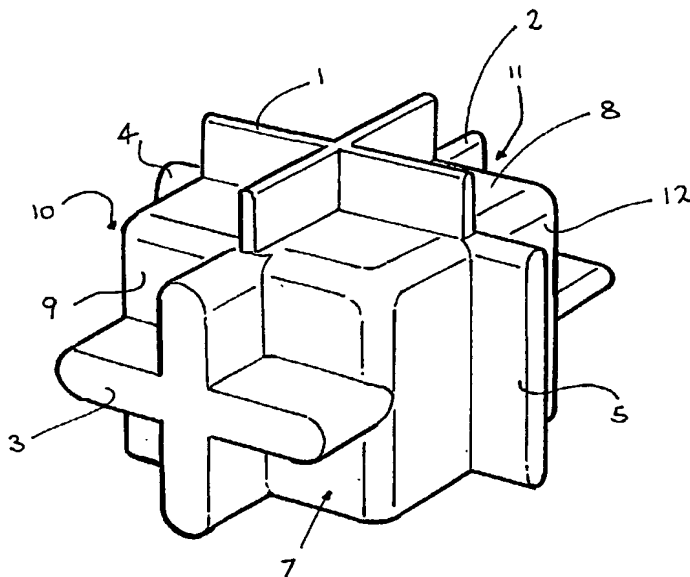

(57) Abstract: A tile spacer holder including two opposed tile spacers (1, 2, 3, 4, 5, 6) supported in a spaced apart position by an interconnecting member (7), the holder configured to provide for finger gripping between the two opposed tile spacers (1, 2, 3, 4, 5, 6). This is generally provided in cuboidal form with sides of equal length each supporting a spacer. The spacers might be provided as three pairs each providing for spacing apart of tiles to a common gap. Preferably the tile space holder has an open cup shaped form that allows for moulding in a two piece die.

WO 2004/001159 A1